

LUMIWISE[®]


LED LINEAR LIGHT SPECIFICATION

LUMILENA PRO Linear Light Continuous Line option



Note: Lumiwise may change product specifications and installation guidance without prior notice.

LUMILENA PRO Series

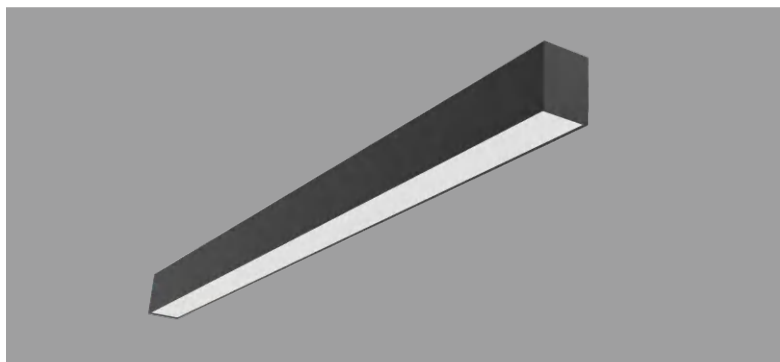

Features& Benefits

- High efficacy of more than 140LM/W.
- Seamless connection without light leakage.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless endcap.



Discreet and timeless pendant light with direct or direct/indirect light emission.

Aluminum profile powder-coated in white and black.





Highly efficient lighting system with optimal light control.

Available in anti-glare or efficiency-optimized versions.

Excellent for office areas ($UGR \leq 19$) with Microprismatic diffuser

Available in individual light colors as well as freely adjustable light colors, making them ideal for modern interior lighting design.

Dimension

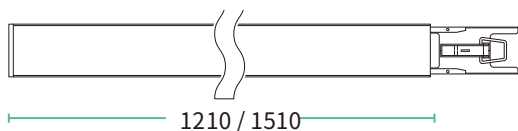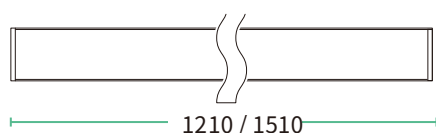


Continuous

Luminaire Parameters (Data tested by ies)

Item Code	LN60801201C	LN60801501C	LN6080301C
Size	1147*60*80mm	1432*60*80mm	3032*60*80mm
Efficacy		140lm/W-150lm/W	
UGR		UGR<19 (Microprismatic) ,UGR<22 (Opal Diffuser)	
Diffuser material		Diffuser/ Micro Prismatic	
Lumens	3200lm (Direct Light)	4000lm (Direct Light)	8000lm (Direct Light)
Typ.power	21W	27W	53W
CCT		3000K/4000K/3000-6500K	
CRI		>80 (90 optional)	
Beam angle		Direct & Indirect/direct	
Input voltage		200-240VAC 50Hz/60Hz	
Linkable		YES	
Power factor		>0.9	
Power Supply		BOKE /TRIDONIC Driver	
Dimming		On/off or DALI	
Color		RAL 9016 RAL 9005	
Installation		Ceiling Surface mouted/Pendant/Recessed	
Warranty		5 years	
Certifications		CE/RoHS	

Continuous Connction System

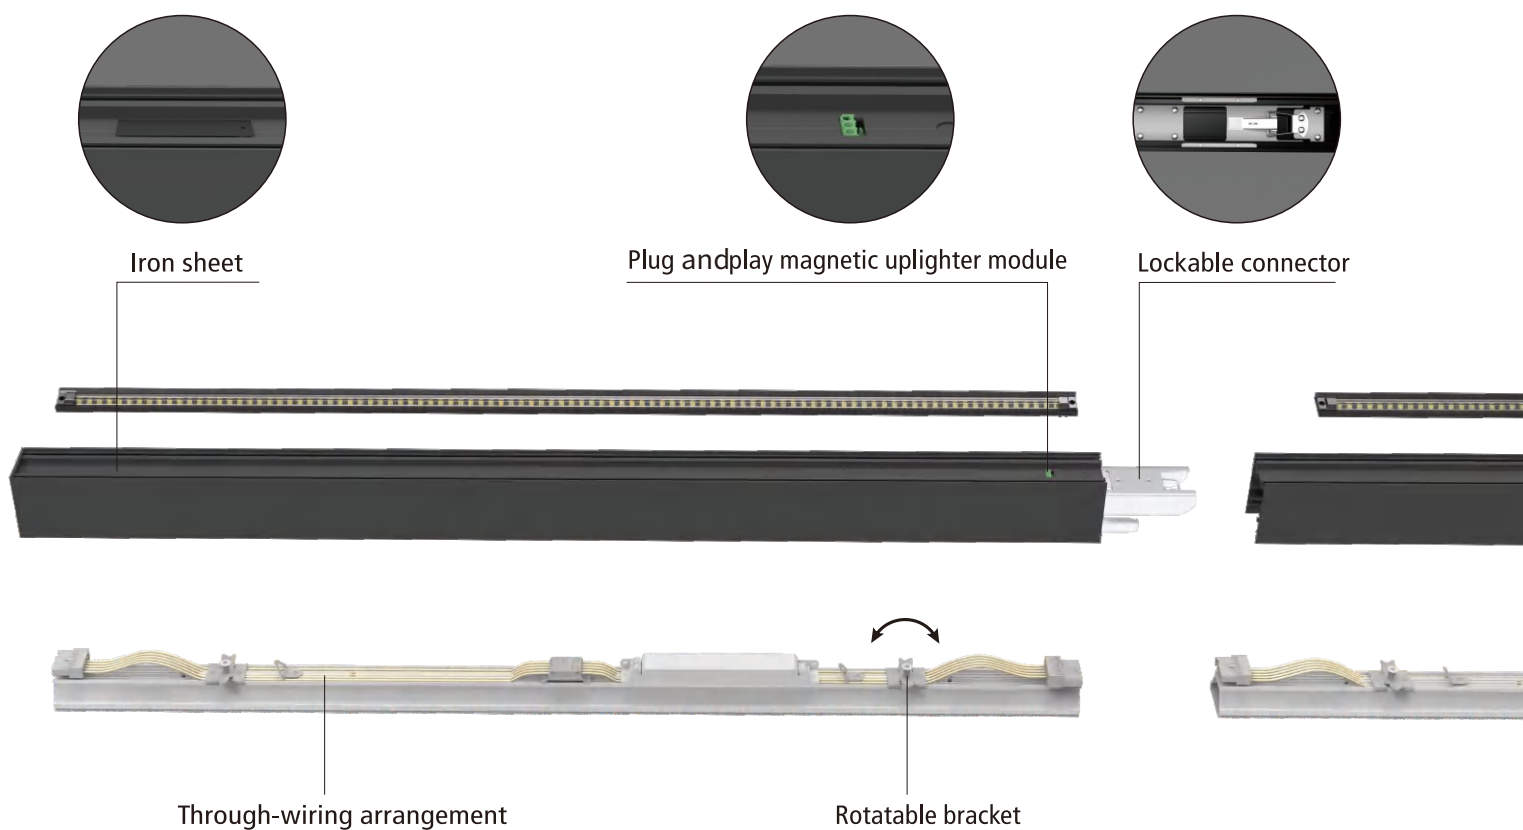

OPTIONS

• DIFFUSER:

OPAL DIFFUSER Max length 40M



PRISMATIC DIFFUSER Max length 20M



Note:

Prismatic diffuser is UGR<19, when used with uplighter the prismatic diffuser version will be UGR<16.

CONTROL:

-Analogue dimming: 1-10V DIM

CASAMBI

DIMENSIONS


Front view

Side view



MODEL NO	DIMENSIONS(L×W×H) (mm)
LN60800601C	600×60×80
LN60801201C	1200×60×80
LN60801501C	1500×60×80
LN6080301C	3000×60×80

PHOTOMETRIC DATA

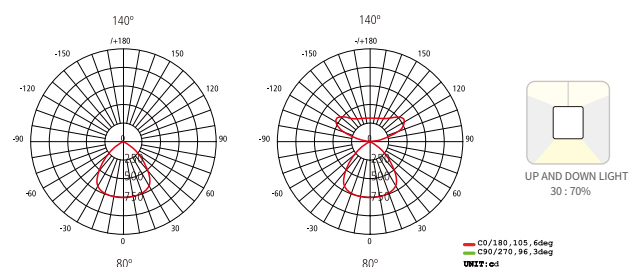

ACCESSORIES

IMAGE	MODEL NO.	RECOMMENDED QTY WHEN JOINED
FOR SURFACE MOUNTED AND SUSPENDED USE		
	000001B MOUNTING CLIPS	Mounting point @ every 1.5m
	000001CAP END CAP BK	One for each end
	000002CAP END CAP WH	
	OPAL DIFFUSER	Add connecting lengths together to get the correct cutting run
	PRISMATIC DIFFUSER	
FOR SUSPENDED USE		
	SUSPENSION KIT	Mounting point @ every 1.5m
	3 CORE POWER CABLE	One power feed, standard length 1.5m, longer lengths are available on request
	5 CORE POWER CABLE (FOR DALI DIM)	
	CEILING BOX BK	 One 60mm 30mm
	CEILING BOX WH	
OPTIONAL FOR SUSPENDED USE		
	120 Up Light MODULE	Tri-colour, 1.2m length
	150 UP Light MODULE	Tri-colour, 1.5m length
OPTIONAL FOR SURFACE MOUNTED AND SUSPENDED USE		
	L-CONNECTOR WH L-CONNECTOR BK L-CONNECTOR WH DALI L-CONNECTOR BK DALI	
	T-CONNECTOR WH T-CONNECTOR BK T-CONNECTOR WH DALI T-CONNECTOR BK DALI	
	X-CONNECTOR WH X-CONNECTOR BK X-CONNECTOR WH DALI X-CONNECTOR BK DALI	

 Specifications above are for reference only and may vary without prior notice

Package

Package	Product Size (mm)	Carton L (cm)	Carton W (cm)	Carton H (cm)	Total Volume (CBM)	G.W (KG)	G.W (KG)	Volume weight
4pcS/carton	1200mm	137	37	15	0.076	13	12	15.207
	1500mm	163	37	15	0.090	17	12	18.093